

TY*ABLE™ CABLES

Assorted Ties

ABLE Part No.	Min Tensile Strength		Max Bundle Diameter		Approx. Length		Hole Size	Fig.
	LB.	KG.	IN.	MM.	IN.	MM.		
C-TM4	30	13	1	25.4	5.50	139.7	4	1
C-TM40	30	13	2	50.8	8.50	215.9	4	1
C-TM5	40	18	1 1/4	31.8	6.50	165.1	8	1
C-TM6	50	22	1 3/4	44.5	8	203.2	10	1
C-TM6T	50	22	1 3/4	44.5	8	203.2	6/32+	1
C-TM110	50	22	3	76.2	12	317.5	10	1
C-TM140	50	22	4	101.6	15	381.0	10	1
C-THM140 120	120	54	4	101.6	15	381.0	1/4	1
C-THM210 120	120	54	6	152.4	22	558.8	1/4	1
C-THM280 120	120	54	8	203.2	29	736.6	1/4	1
PUSH MOUNT CABLE TIES (Panel)								
C-PMT6	50	22	1 3/4	44.50	8	203.20	1/4	2
C-PMT110	50	22	3	76.2	12.00	317.5	1/4	2
C-PMT140	50	22	4	101.6	15	381	1/4	2
C-PMTW-4	50	13	1 1/4	152.40	6	152.4	3/16	2
DOUBLE LOOP CABLE TIES								
C-DL6	50	22	1 3/4	44.5	7	177.8	N/A	3
C.DL110	50	22	3	76.2	11.75	298.5	N/A	3
C-DL140	50	22	4	101.6	14.75	374.7	N/A	3
LOW COST LADDER TIES								
C-TF-7	40	19	1 3/4	44.50	7	177.80	N/A	4
C-TF-7B*	40	19	1 3/4	44.50	7	177.80	N/A	4
C-TF-11	40	18	3	76.20	7	177.80	N/A	4
C-TF-11B*	40	18	3	76.20	7	177.80	N/A	4

, BLACK. Other colors available.


Notes:

* Black heat stabilized.

** Combined bundle diameter.

+ Tap screw hole.

fig.1

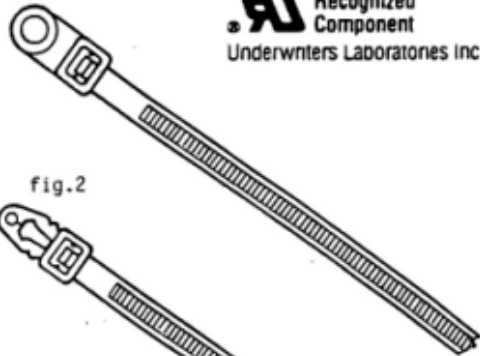

RU Recognized
Component
Underwriters Laboratories Inc.

fig.2

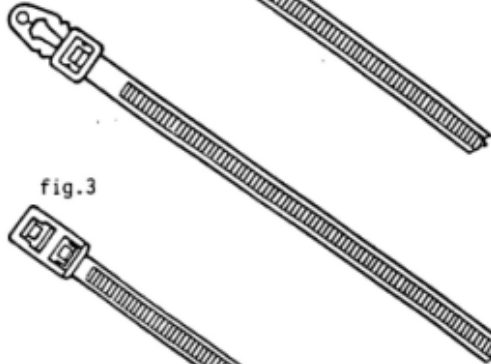


fig.3

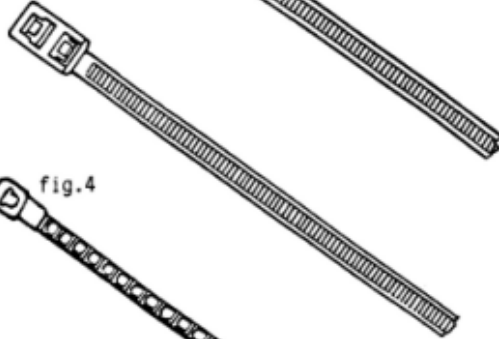


fig.4

