

TY*ABLE™ CABLES

NYLON BEADED TIES

ABLE Part No.	Min. Tensile Strength		Max Bundle Diam.		Appr. Length		Bead Dimensions		Fig
	LB.	KG.	IN.	MM.	IN.	MM.	IN.	MIN.	
C-BT4	40	18	1 1/8	28.6	4.25	108.0	0.093	2.36	1
C-BT5	40	18	1 3/8	34.9	5	127.0	0.093	2.36	1
C-BT6	75	34	1 7/8	47.6	6.75	171.5	0.125	3.17	1
C-BT8	75	34	2 1/2	88.9	9	118.6	0.125	3.17	1
C-BT10	75	34	3	76.2	11	279.4	0.125	3.17	1
C-BT14	75	34	4	63.5	15	381.0	0.125	3.17	1
C-BT17	75	34	5	127.0	18	457.2	0.125	3.17	1

RELEASABLE TIES






ABLE Part No.	Min. Tensile Strength		Max Bundle Diam.		Appr. Length		Fig
	LB.	KG.	IN.	MM.	IN.	MM.	
C-T05	50	22	1 1/4	31.8	5.50	139.7	2
C-T08	50	22	2	50.8	8	203.2	2
C-T105	50	22	2 1/2	63.5	10.50	266.7	2
C-T150	250	114	4	101.6	15.25	387.4	2
C-T215	250	114	6	152.4	21.50	546.1	2
C-T270	250	114	8	203.2	27.75	704.9	2


MINI TIES

ABLE Part No.	Min. Tensile Strength		Max Bundle Diam.		Appr. Length		Tie Material	Fig
	LB.	KG.	IN.	MM.	IN.	MM.		
C-MT-1N*	18	8	1 3/8	34.9	5	127.0	NYLON	3
C-MT-1R*	18	8	1 3/8	34.9	5	127.0	NYLON	3
C-MT-2N**	18	8	1 3/8	34.9	5	127.0	NYLON	4
C-MT-1R**	18	8	1 3/8	34.9	5	127.0	NYLON	4
C-MTS-1W+	18	8	2	34.9	5	203.2	POLYPROP	5
STANDARD COLORS: N - Natural R - Red W - White								

STANDARD COLORS: NATURAL, BLACK. Other colors available.

Notes:
* Releasable Ties
** Permanent Ties
+ SECURE-A-SEAL (tm) Dennison

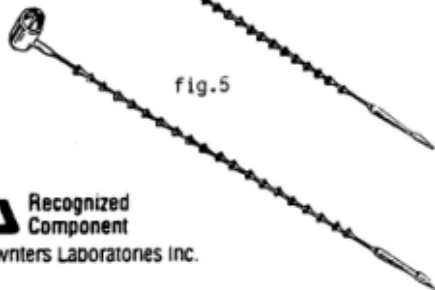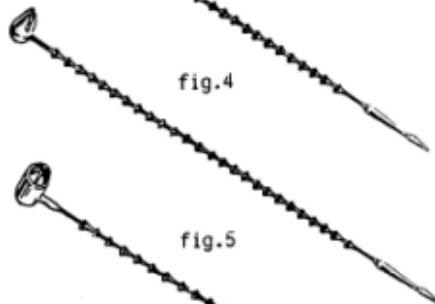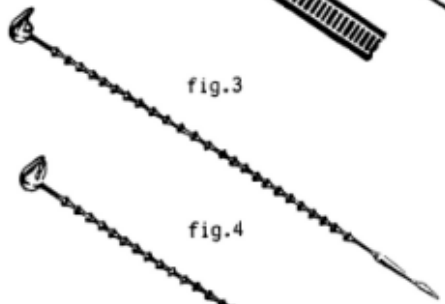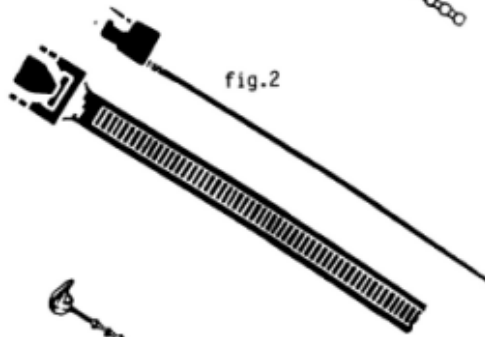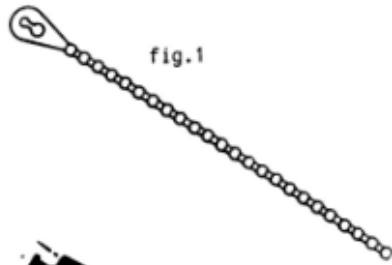

 **Recognized
Component**
Underwriters Laboratories Inc.