


HEAT SHRINK-ABLE TUBING

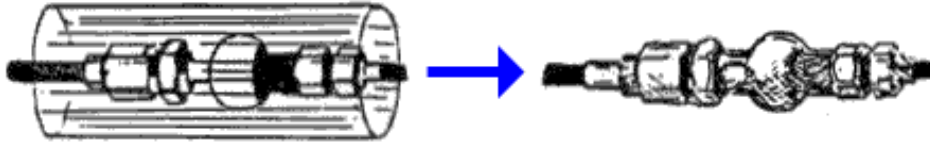

TFE TEFLON® 4:1 SHRINK RATIO

TFE TEFLON® ULTRA LIGHT 2:1 SHRINK RATIO

TFE

PRODUCT DESCRIPTION

Flexible TPE TEFLON® heat shrink tubing meets all requirements of Military Specification MIL-I-23053/12.

SA550

- MIL-I-23053/121
- Shrink ratio 4:1
- Shrink temp: 340 C
- Operating temp: -65 C to +260 C
- Excellent for providing a highly reliable protective jacket
- Superior outstanding physical, chemical, and heat protection for which TFE TEFLON® is famous

STANDARD LENGTH: 4 foot lengths

STANDARD COLOR: Natural

ABLE Part No.					Nominal Wall Thickness after shrinking			
	Minimum I.D. As Supplied		Maximum I.D. after shrinking		Nominal		Tolerance	
	IN.	MM.	IN.	MM.	IN.	MM.	IN.	MM.
SA550-5/64	0.078	1.980	0.025	0.63	0.009	0.23	0.002	0.51
SA550-1/8	0.125	3.180	0.037	0.94	0.010	0.25	0.002	0.51
SA550-3/16	0.187	4.750	0.050	1.27	0.012	0.30	0.003	0.76
SA550-1/4	0.250	6.350	0.063	1.60	0.012	0.30	0.003	0.76
SA550-5/16	0.312	7.920	0.078	1.98	0.012	0.30	0.003	0.76
SA550-3/8	0.375	9.520	0.096	2.44	0.012	0.30	0.003	0.76
SA550-7/16	0.438	11.130	0.112	2.84	0.012	0.30	0.003	0.76
SA550-1/2	0.500	12.700	0.144	3.66	0.015	0.380	0.004	1.02
SA550-9/16	5.620	14.270	0.155	3.94	0.015	0.380	0.004	1.02
SA550-5/8	0.625	15.880	0.178	4.52	0.015	0.380	0.004	1.02
SA550-11/16	0.687	17.450	0.198	5.03	0.015	0.380	0.004	1.02
SA550-3/4	0.750	19.050	0.224	5.69	0.015	0.380	0.004	1.02
SA550-7/8	0.875	22.230	0.244	6.20	0.015	0.380	0.004	1.02
SA550-1	1.000	25.400	0.278	7.06	0.015	0.380	0.004	1.02
SA550-1 1/4	1.250	31.750	0.347	8.81	0.015	0.380	0.004	1.02
SA550-1 1/2	1.500	38.100	0.400	10.16	0.015	0.380	0.004	1.02
SA550-1 3/4	1.750	44.450	0.450	11.43	0.015	0.380	0.004	1.02
SA550-2	2.000	50.800	0.520	13.21	0.020	0.510	0.005	1.27
SA550-2 1/4	2.250	57.150	0.585	14.86	0.020	0.510	0.005	1.27
SA550-2 1/2	2.500	63.500	0.650	16.51	0.020	0.510	0.005	1.27
SA550-2 3/4	2.750	69.850	0.710	18.03	0.020	0.510	0.005	1.27
SA550-3	3.000	76.200	0.775	19.69	0.020	0.510	0.005	1.27
SA550-3 1/4	3.250	82.550	0.835	21.21	0.020	0.510	0.005	1.27
SA550-3 1/2	3.500	88.900	0.900	22.86	0.025	0.64	0.005	1.27
SA550-3 3/4	3.750	95.250	0.960	24.38	0.025	0.64	0.005	1.27
SA550-4	4.000	101.600	1.025	26.04	0.025	0.64	0.005	1.27

TFE ULTRA LIGHT WALL

PRODUCT DESCRIPTION

Flexible TFE TEFLON™ heat shrink tubing is ultra light wall for micro applications.

- SA560
- Shrink ratio approx. 2:1
- Shrink temp: 340°C
- Operating temp: -65°C to +260°C
- Excellent for providing a reliable protective jacket
- Outstanding physical, chemical, and heat protection for which TFE Teflon™ is famous.

STANDARD LENGTH: 1-3 feet.

STANDARD COLOR: Natural

ABLE Part No.	Minimum I.D. As Supplied		Maximum I. D. after shrinking		Nominal Wall Thickness after shrinking	
	IN.	MM.	IN.	MM.	IN.	MM.
SA560-34	0.020	0.51	0.008	0.20	0.0040	0.102
SA560-33	0.025	0.64	0.010	0.25	0.0040	0.102
SA560-32	0.030	0.76	0.012	0.30	0.0030	0.076
SA560-30	0.034	0.86	0.015	0.38	0.0030	0.076
SA560-28	0.038	0.97	0.018	0.46	0.0030	0.076
SA560-26	0.046	1.17	0.022	0.56	0.0020	0.051
SA560-24	0.50	1.27	0.027	0.69	0.0020	0.051
SA560-22	0.055	1.40	0.032	0.81	0.0020	0.051
SA560-20	0.060	1.52	0.039	0.99	0.0020	0.051
SA560-18	0.076	1.93	0.049	1.24	0.0015	0.038
SA560-16	0.093	2.36	0.061	1.55	0.0015	0.038
SA560-14	0.120	3.05	0.072	1.83	0.0015	0.038
SA560-12	0.150	3.81	0.089	2.26		
SA560-10	0.191	4.85	0.112	2.84	0.0020	0.051
SA560-8	0.240	6.10	0.141	3.58	0.0025	0.064
SA560-6	0.302	7.67	0.178	4.52	0.0025	0.064
SA560-4	0.370	9.40	0.224	5.69	0.0035	0.089
SA560-2	0.430	10.92	0.278	7.06	0.0040	0.102
SA560-0	0.470	11.94	0.347	8.81	0.0050	0.127