




ABL ELECTRONIC SUPPLIES, INC.
 1032-A CENTRAL DRIVE NW
 CONCORD, NC 28027

PHONE/FAX: 704-784-4225/0255

SALES@ABLEWIRE-CABLE.COM

SALES@GROUNDSTRAPS.COM

HEAT SHRINK-ABLE TUBING 2:1 SHRINK RATIO

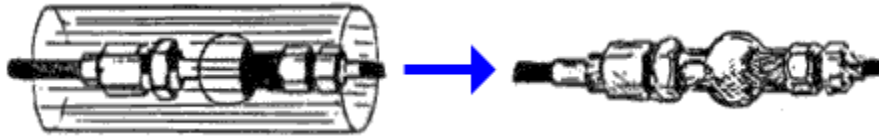

FLEXIBLE POLYVINYLCHLORIDE

CLASS II

- MIL-I-2505312
- Shrink ratio 2:1
- Shrink temp: 100°C
- Operating temp: -20°C to +105°C
- Flexible, flame retardant
- Superior heat resistance and storage stability
- Longitudinal shrinkage: 20% max.

*** COLOR CODE**

- 3/64" to 1/16" Black only
- 3/32" to 1" Black White Clear
- 1 1/2" to 3" Black only

Flexible polyvinylchloride heat shrinkable tubing which meets all the requirements of MIL-I-23053/2 Class I and II Subject 224.

ABLE Part No.	Minimum I.D. As Supplied		Maximum I.D. after shrinking		Nominal Wall Thickness after shrinking		MIL Specs M25053/2	
	IN.	MM.	IN.	MM.	IN.	MM.	Class II	Spool Size (ft)
SR100-3/64-*	0.048	1.17	0.023	0.58	0.020	0.51	201-*	1000
SR100-1/16-*	0.063	1.60	0.031	0.79	0.020	0.51	202-*	1000
SR100-3/32-*	0.093	2.36	0.048	1.17	0.025	0.54	203-*	1000
SR100-1/8-*	0.125	3.18	0.062	1.60	0.025	0.64	204-*	1000
SR100-3/16-*	0.187	4.75	0.093	2.36	0.025	0.64	205-*	1000
SR100-1/4-*	0.250	6.35	0.125	3.18	0.025	0.64	206-*	1000
SR100-3/8-*	0.375	9.52	0.187	4.75	0.025	0.64	207-*	500
SR100-1/2-*	0.500	12.70	0.250	6.35	0.025	0.64	208-*	250
SR100-3/4-*	0.750	19.05	0.375	9.52	0.030	0.76	209-*	250
SR100-1-*	1.00	25.40	0.500	12.70	0.035	0.89	210-*	250
SR100-1 1/2-*	1.50	38.10	0.750	19.05	0.043	1.09	211-*	100
SR100-2-*	2.00	50.80	1.00	25.40	0.048	1.22	212-*	100